




LUMI-S



LUMI-R

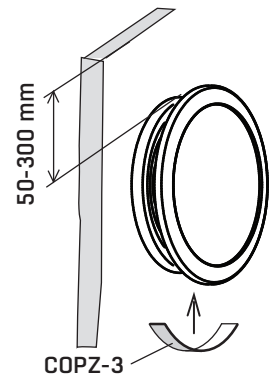


LUMI

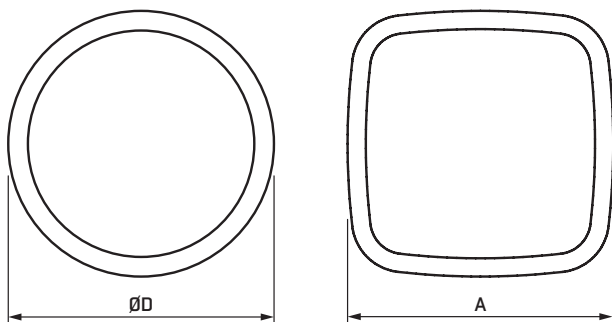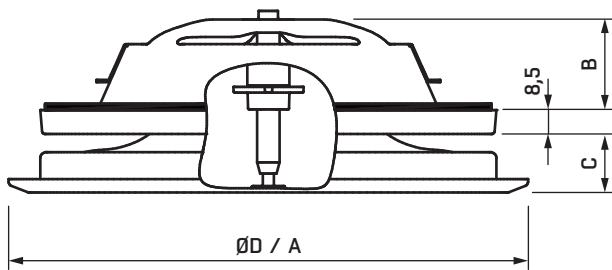


LUMI	ØD	A	B	C <sub>min</sub>	C <sub>max</sub>
100	145	145	26	16	21/24*
125	185	185	32	18	31
160	215	215	37	22	38
200	270	270	47	27	43

KKT, KKL




KKT/KKL/KKU	Ød	ØD	Ød <sub>s</sub>
100	99	122	100
125	124	148	125
160	159	184	160
200	199	225	200

KKU






KGEZ-01



KGEZ-01	Ød	ØD
100	99	123
125	124	149
160	159	185

Ø100:  
360°: C<sub>max</sub> = 21 mm  
270°: C<sub>max</sub> = 24 mm

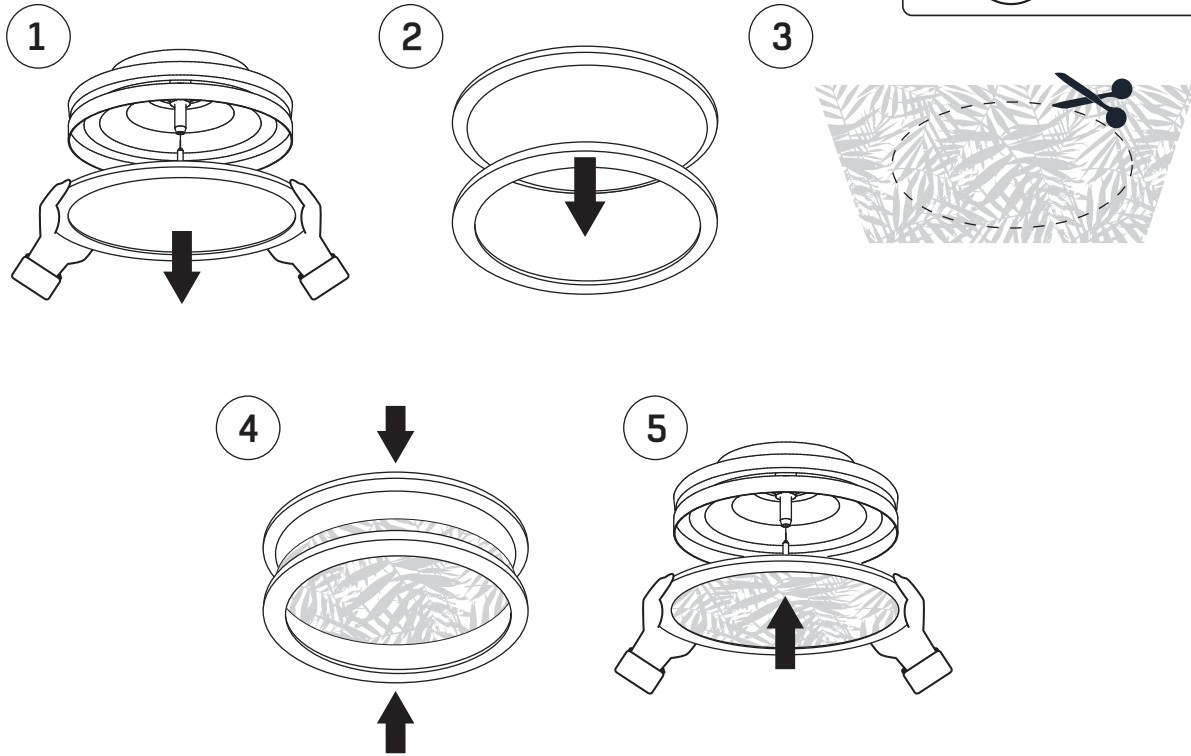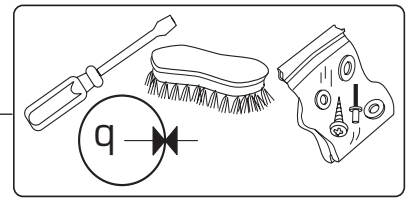


$$q = k \sqrt{\Delta p_m}$$

(l/s) (Pa)

$$q = 3.6k \sqrt{\Delta p_m}$$

(m³/h) (Pa)


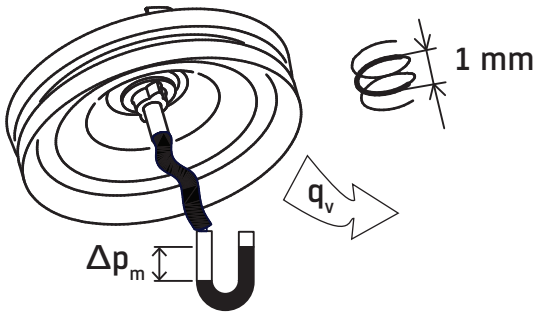


LUMI-100 - 360°	
s (mm)	k
20	0.82
19	1.31
18	1.74
17	2.13
16	2.46
15	2.73
14	2.96
13	3.13

LUMI-100 - 270°	
s (mm)	k
20	0.71
19	1.04
18	1.35
17	1.63
16	1.89
15	2.13
14	2.34
13	2.52
12	2.68
11	2.82
10	2.93

LUMI-125 - 360°	
s (mm)	k
27	1.08
26	1.71
25	2.31
24	2.87
23	3.38
22	3.86
21	4.29
20	4.69
19	5.05
18	5.36
17	5.64
16	5.87
15	6.07
14	6.22

LUMI-125 - 270°	
s (mm)	k
27	0.95
26	1.44
25	1.90
24	2.33
23	2.74
22	3.13
21	3.49
20	3.82
19	4.14
18	4.42
17	4.68
16	4.92
15	5.13
14	5.32

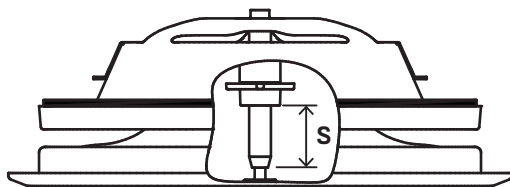


LUMI-160 - 360°	
s (mm)	k
33	3.10
32	3.81
31	4.48
30	5.10
29	5.67
28	6.20
27	6.68
26	7.12
25	7.51
24	7.86
23	8.16
22	8.41
21	8.62
20	8.78
19	8.90
18	8.97
17	8.99


LUMI-160 - 270°	
s (mm)	k
33	2.29
32	2.80
31	3.29
30	3.75
29	4.19
28	4.60
27	5.00
26	5.36
25	5.71
24	6.03
23	6.32
22	6.60
21	6.85
20	7.07
19	7.27
18	7.45
17	7.60

LUMI-200 - 360°	
s (mm)	k
44	3.58
43	4.66
42	5.69
41	6.68
40	7.63
39	8.53
38	9.40
37	10.22
36	11.00
35	11.74
34	12.44
33	13.10
32	13.71
31	14.28
30	14.81
29	15.30
28	15.75


LUMI-200 - 270°	
s (mm)	k
44	3.03
43	3.78
42	4.51
41	5.22
40	5.91
39	6.57
38	7.22
37	7.84
36	8.44
35	9.02
34	9.58
33	10.12
32	10.63
31	11.13
30	11.60
29	12.05
28	12.48

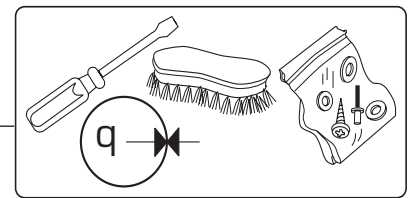


LUMI-100 - 360° 1)

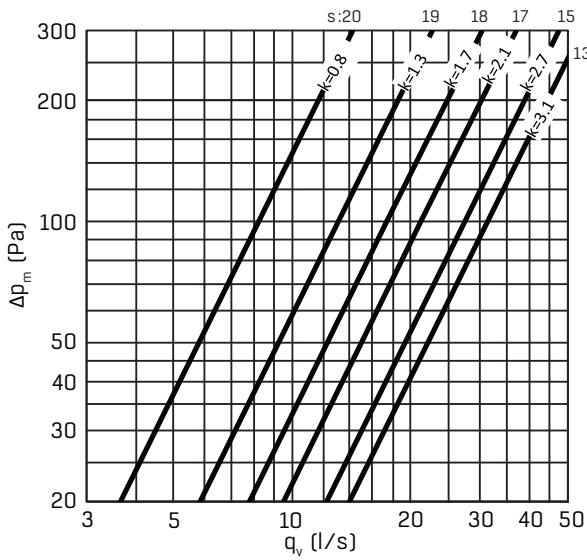


LUMI-100 - 270° 1)

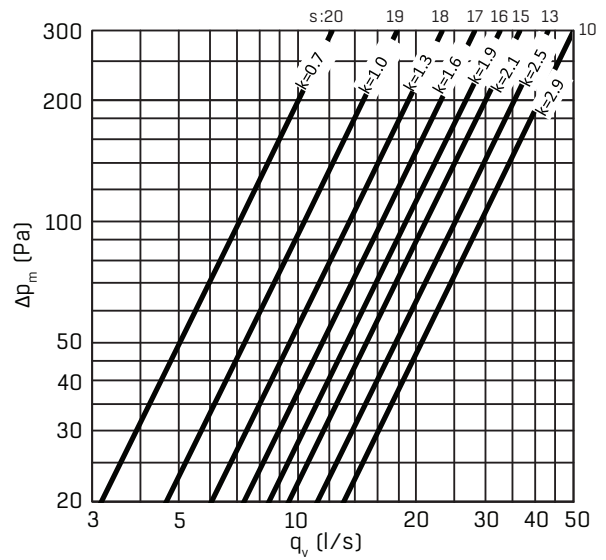


LUMI-125 - 360° 1)

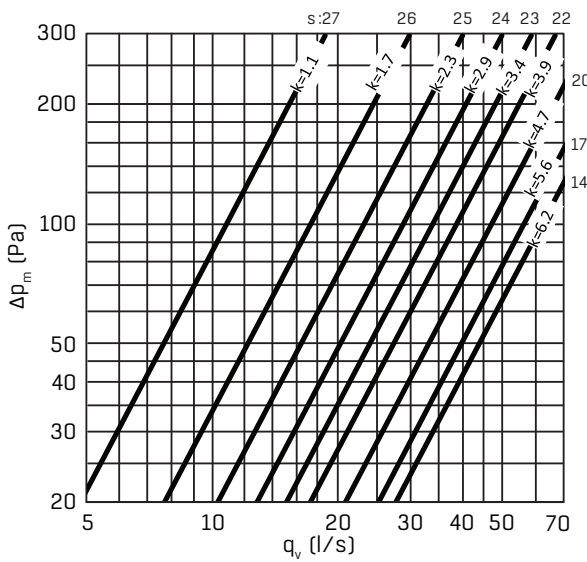


LUMI-125 - 270° 1)

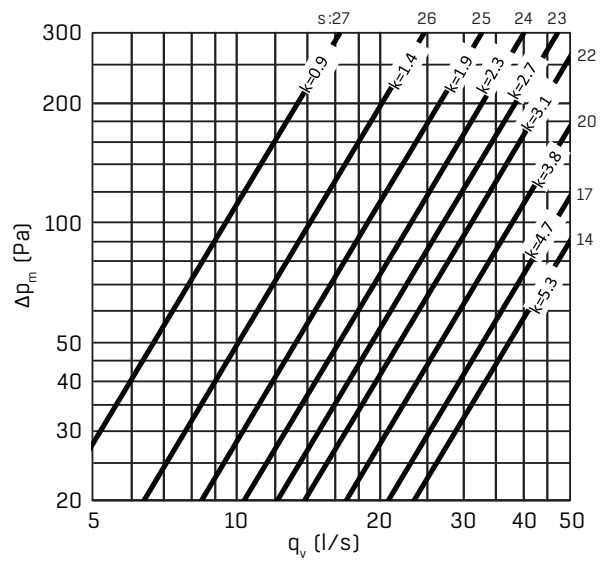


LUMI-160 - 360°

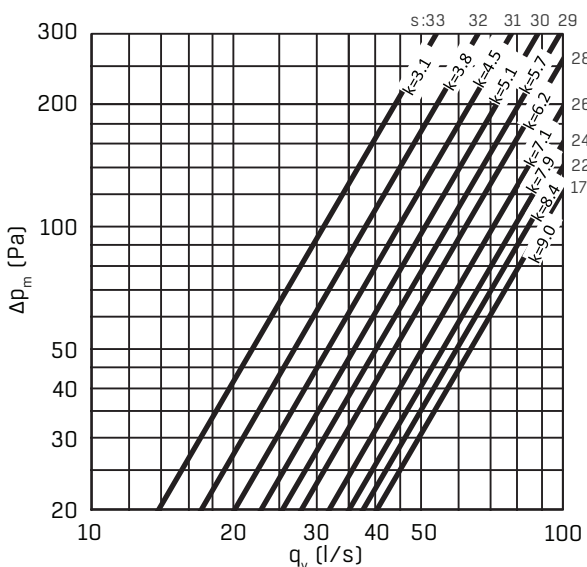


LUMI-160 - 270°

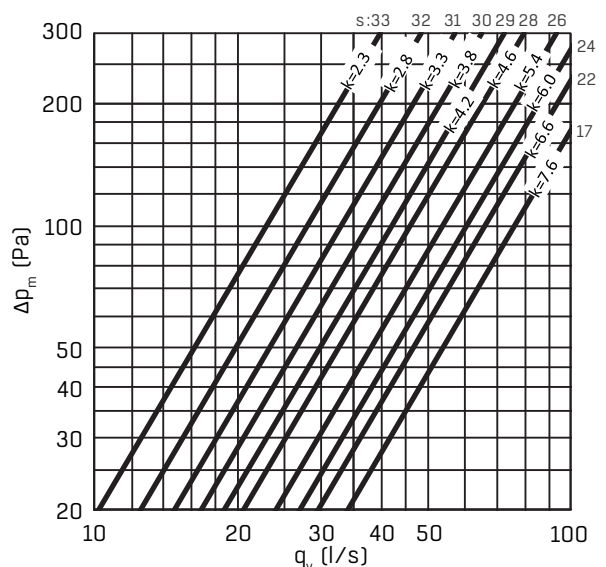




1) FI: LUMI koko 100 (kaikki säätöasetnot) ja koko 125 (säätöasetno  $\geq 21$ ) täyttää savukaasujen leviämistä rajoittavalle kuristimelle asetetut vaatimukset.

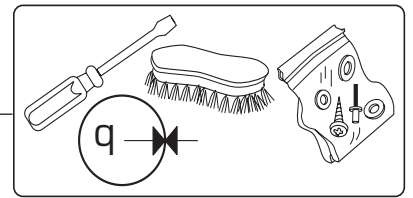


LUMI-200 - 360°

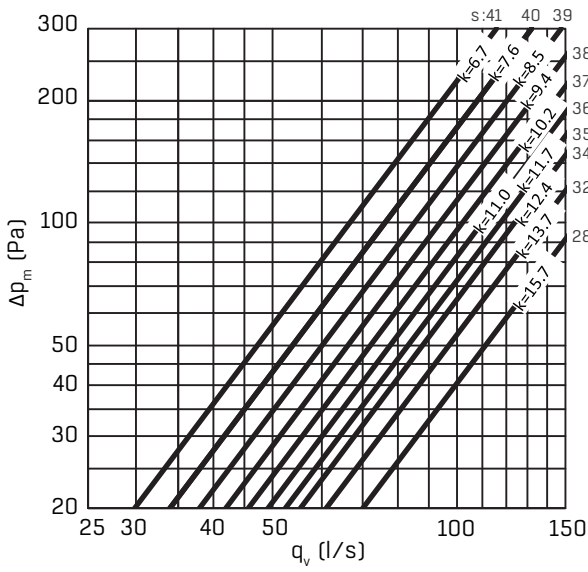


LUMI-200 - 270°

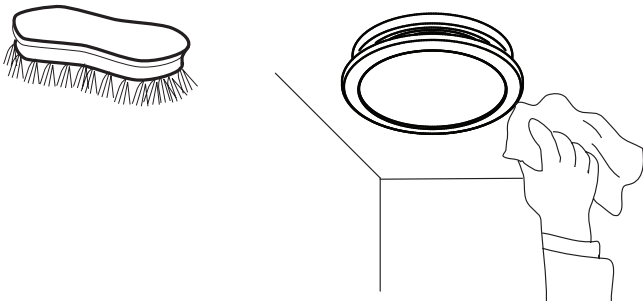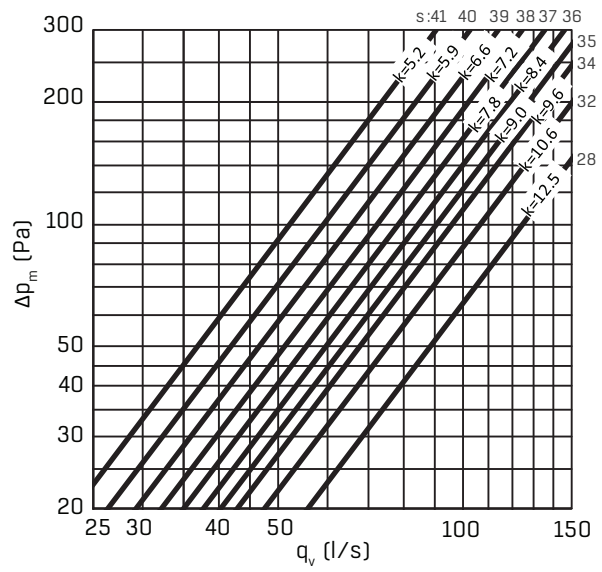

LUMZ-R-aaa-C




LUMZ-S-aaa-C



aaa
100
125
160
200

COGZ-aaa-9

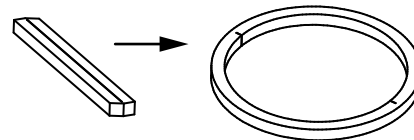

aaa
100
125
160
200

LUMR-aaa




LUMS-aaa



aaa
100
125


COCZ-2



COAZ-3

10
20
30
40
s (mm)
LUMI/LUMO

COPZ-3

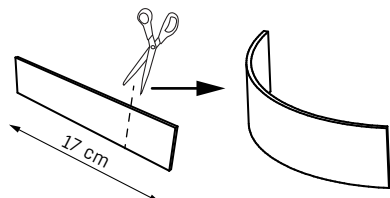

100, 125	12 cm
160, 200	17 cm

COSZ-aaa-1



aaa
100
125